# bühler

# farm king



5" & 6" Utility Augers

Operator's and Parts Manual FK339



# **TABLE OF CONTENTS**

DESCRIPTION	PAGE
WARRANTY	1
INTRODUCTION	2
SAFETY Safety General Safety Start Up Safety Operation Safety Service and Maintenance Safety Storage Safety Safety Signs Safety Sign Installation	34445
ASSEMBLY	
OPERATION	
MAINTENANCE Bolt Torque	
PARTS DRAWINGS	10
SHIPPING KIT AND BUNDLE NUMBERS	13



# WARRANTY POLICY

Buhler Manufacturing products are warranted for a period of twelve (12) months (90 days for commercial application) from original date of purchase, by original purchaser, to be free from defects in material and workmanship under correct, normal agricultural use and proper applications.

Buhler Manufacturing's obligations under this warranty shall be limited to the repair or exchange, at Buhler Manufacturing's option, of any Buhler Manufacturing product or part which proves to be defective as provided. Buhler Manufacturing reserves the right to either inspect the product at the buyer's location or have it returned to the factory for inspection.

The above warranty does not extend to goods damaged or subject to accident, abuse or misuse after shipment from Buhler Manufacturing's factory, nor to goods altered or repaired by anyone other than an authorized Buhler Manufacturing representative.

Buhler Manufacturing makes no Express Warranties other than those, which are specifically described. Any description of goods, including any references and specifications in catalogues, circulars and other written material published, is for the sole purpose of identifying goods and shall conform to such descriptions. Any sample or model is for illustrative purposes only and does not create an Express Warranty that the goods conform to sample or model shown.

The purchaser is solely responsible for determining suitability of goods sold. This warranty is expressly in lieu of all other warranties expressed or implied. Buhler Manufacturing will in no event be liable for any incidental or consequential damages whatsoever. Nor for any sum in excess of the price received for the goods for which liability is claimed.

#### **WARRANTY CLAIMS:**

Warranty requests must be prepared on Buhler Manufacturing Warranty Claim Forms with all requested information properly completed. Warranty Claims must be submitted within a thirty (30) day period from date of failure repair.

#### **WARRANTY LABOR:**

Any labor subject to warranty **must** be authorized by Buhler Manufacturing. The labor rate for replacing defective parts, where applicable, will be credited at 100% of the dealer's posted shop rate. Defective parts will receive an extra 10% discount to assist with freight or other incidental costs.

#### **GOVERNMENT LEGISLATION:**

Warranty terms and conditions are subject to Provincial or State legislation.

#### **IMPORTANT FACTS:**

Buckets and Bucket Tines Carry No Warranty Bent Spears Carry No Warranty Snowblower Fan Shafts Carry No Warranty Mower Blades Carry No Warranty Portable Auger Parts Have Two (2) Year Warranty Loader Parts Have Two (2) Year Warranty

IMPORTANT NOTE: This warranty does not apply to rentals



#### INTRODUCTION

The Buhler Farm King Utility Augers offer heavier gauge tubing to assure extra durability. The flow control gives you quick and easy regulation of grain flow, and allows the auger to be cleaned out prior to shut down. The intake flighting on all augers is protected by an intake guard to prevent injuries. Belt guards are standard on all units.

All Buhler Farm King Utility Augers feature adjustable motor mounts, so you can choose the size and brand of electrical motor to suit your needs. Auger pulleys are supplied on all sizes.

Keep this manual handy for frequent reference. All new operators or owners must review the manual before using the equipment and at least annually thereafter. Contact your Buhler Dealer if you need assistance, information, or additional copies of the manual. Visit our website at www.buhler.com for a complete list of dealers in your area.

The directions left, right, front and rear, as mentioned throughout this manual, are as seen facing in the direction of travel of the implement.



#### **SAFETY INSTRUCTIONS**

Remember, YOU are the key to safety. Good safety practices not only protect you, but also the people around you. Make these practices a working part of your safety program. Be certain that everyone operating this equipment is familiar with the recommended operating and maintenance procedures and follows all the safety precautions. Most accidents can be prevented. Do not risk injury or death by ignoring good safety practices.

The alert symbol is used throughout this manual. It indicates attention is required and identifies hazards. Follow the recommended precautions.



The safety alert symbol means...

ATTENTION! BECOME ALERT! YOUR SAFETY IS INVOLVED!



# CAUTION

The caution symbol indicates a potentially hazardous situation that, if not avoided, may result in minor or moderate injury. It may also be used to alert against unsafe practices.



# WARNING

The Warning Symbol indicates a potentially hazardous situation that, if not avoided, could result in death or serious injury, and includes hazards that are exposed when guards are removed. It may also be used to alert against unsafe practices.



#### DANGER

The Danger Symbol indicates an imminently hazardous situation that, if not avoided will result in death or serious injury. This signal word is to be limited to the most extreme situations, typically for machine components that, for functional purposes, cannot be guarded.



#### **GENERAL SAFETY INSTRUCTIONS**

Have a first-aid kit available for use and know how to use it.

Have a fire extinguisher available, stored in a highly visible location, and know how to use it.

Wear appropriate protective gear. This list may include but is not limited to:

- Hard hat
- Protective shoes with slip resistant soles
- Protective glasses or goggles
- Heavy gloves
- Wet weather gear
- Hearing protection
- Respirator or filter mask

Read and understand the Operator's Manual and all safety signs before operating, servicing, adjusting, repairing, or unplugging the equipment.

Do not attempt any unauthorized modifications to your Buhler product as this could affect function or safety, and could affect the life of the equipment.

Inspect and clean the working area before operating.

Keep hands, feet, clothing, and hair away from moving parts.

Ensure bystanders are clear of the area before operating.

#### **START-UP SAFETY**

Do not let inexperienced operators or children run this equipment. Ensure all shields are in place and in good condition before operating.

Make certain electric motors are grounded.

#### **OPERATION SAFETY**

Do not wear loose fitting clothing during operation.

Do not allow anyone other than the operator close to the Auger when in operation.

#### SERVICE AND MAINTENANCE SAFETY

Stop engine, set brake, remove ignition key, and wait for all moving parts to stop before servicing, adjusting, repairing, or unplugging.

Support the equipment with blocks or safety stands before working beneath it.

Follow good shop practices including

- Keep service area clean and dry
- Be sure electrical outlets and tools are properly grounded
- Use adequate light for the job

Use only tools, jacks, and hoists of sufficient capacity for the job.

Replace and secure all shields removed during servicing before operating.

Use heavy leather gloves to handle sharp objects.



#### STORAGE SAFETY

Store the unit in an area away from human activity.

Do not permit children to play on or around the stored machine.

Support the frame on stands and blocks to provide a secure base.


#### **SAFETY SIGNS**

The following illustration shows the approximate location and detail of safety signs. Keep all safety signs clean and legible and replace any that are damaged or missing. When original parts are replaced, any safety signs affixed to those parts should be replaced as well. Replacement safety signs are available from your local dealer.


#### **INSTALLATION OF SAFETY SIGNS**

To install safety signs, ensure the installation area is clean and dry. Decide on the exact position before you remove the backing paper. Remove the smallest portion of the split backing paper and align over the specified area. Carefully press in place. Slowly peel back the remaining paper and smooth the remaining portion in place. Small air pockets can be pierced with a pin and smoothed out.



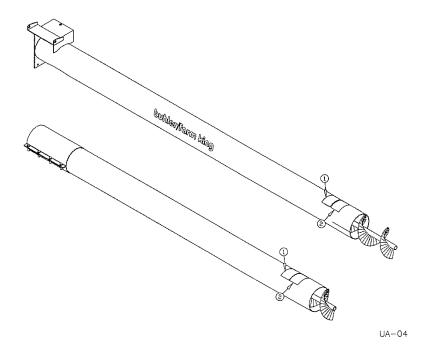

## **SAFETY DECALS**

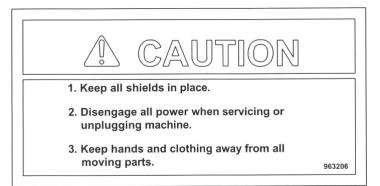

#1



#2

Replace safety signs immediately should they become damaged, torn or illegible. Obtain replacements from your authorized dealer using the part numbers shown.




# **ASSEMBLY INSTRUCTIONS**

- 1. Fasten motor mount (#10) with ½" x 7 ½" pin (#16), cotter pin (#32) and 9/16" washer (#31) using washer as spacer between mount and frame.
- 2. Install 8" sheave (#5) with set screws and  $\frac{1}{4}$ " x 1  $\frac{1}{2}$ " key (#19).
- 3. Fasten grain deflector (#6) with 1/4" x 3/4" hex bolt (#24) and hex nut (#26).
- 4. ½" x 3" sq. hd. set screw (#18) is used as belt tightener underneath motor mount.
- 5. Fasten intake bottom plate (#11) using an intake clamp (#12) with 5/16" x 1 1/4" hex bolts (#33), lock washers (#30) and hex nuts (#29).
- 6. Fasten feed control clamp (#13) approximately 37" from intake end of auger tube (OPTIONAL)
- 7. To fasten belt guard (#17) use: 7/16" flat washer (#20), lock washer (#21), and hex nut (#22). Bolt guard back plates (#36) & (#37) to guard using ½" x ½" hex bolts (#23), lockwashers (#25) and hex nuts (#26).



# OPERATING INSTRUCTIONS THEORY OF OPERATION

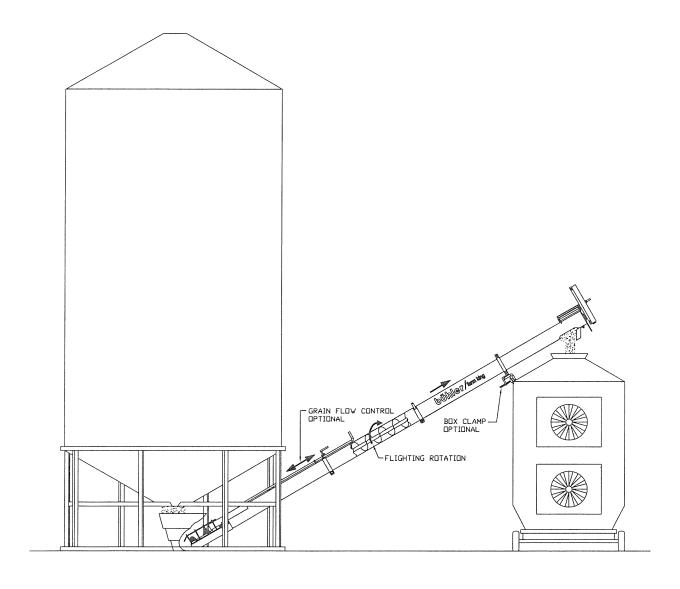



# **MAINTENANCE**

Bolt Torque						
Bolt Diameter	SAE2		SAE5		SAE8	
"A"	N.m	lb-ft	N.m	lb-ft	N.m	lb-ft
1/4"	8	6	12	9	17	12
5/16"	13	10	25	19	36	27
3/8"	27	20	45	33	63	45
7/16"	41	30	- 72	53	100	75
1/2"	61	45	110	80	155	115
9/16"	95	70	155	115	220	165
5/8"	128	95	215	160	305	220
3/4"	225	165	390	290	540	400
7/8"	230	170	570	420	880	650
1"	345	225	850	630	1320	970



# WHEN ORDERING PARTS

Always give your dealer the Model, Color and Serial Number of your machine to assist him in ordering and obtaining the correct parts. Use the exploded view and tabular listing of the area of interest to exactly identify the required part.


**5" & 6" UTILITY AUGERS** 

ITEM	PART#	DESCRIPTION
1	963517	Tube - 5" x 10'
	963617	Tube - 6" x 10'
	963518	Tube - 5" x 15'
	963618	Tube - 6" x 15'
	963519	Tube - 5" x 20'
	963619	Tube - 6" x 20'
2	963504	Flighting - 5" x 11'
	963604	Flighting - 6" x 11'
	963505	Flighting - 5" x 16'
	963605	Flighting - 6" x 16'
	963506	Flighting - 5" x 21'
	963606	Flighting - 6" x 21'
3	961627	1" Bearing c/w Collar
4	963009	1" Bearing Flange
5	963020	8" Single Sheave, 1" Bore
6	963514	Grain Deflector - 5"
	963616	Grain Deflector - 6"
7	963134	Box Clamp
8	963512	Pipe Clamp - 5" (2 Required)
	963610	Pipe Clamp - 6" (2 Required)
9	963136	Clamp Swivel - 5' & 6'
10	963021	Motor Mount Plate
11	963521	5" Intake Bottom Plate
	963621	6" Intake Bottom Plate
12	963520	5' Intake Clamp
	963622	6" Intake Clamp
13	963524	5" Clamp Only
	963623	6" Clamp Only
14	963145	5" & 6" Screw Only
15	963525	5" Feed Control Slide Only
	963624	6" Feed Control Slide Only
16	902996	1/2" x 7 1/2" Hinge Pin
17	963025	Belt Guard
18	963030	1/2" x 3" Sq. Hd. Set Screw



19 20 21 22 23	963026 981616 81615 81614 81523	1/4" x 1 1/2" Key 7/16" Flat Washer (pl) 7/16" Lock Washer (pl) 7/16" Hex Nut (pl) 1/4" x 1/2" Hex Bolt (pl)
24	81525	1/4" x 3/4" Hex Bolt (pl)
25	81545	1/4" Lock Washer (pl)
26	81544	1/4" Hex Nut (pl)
27	81553	5/16" x 1 1/2" Hex Bolt (pl)
28	81549	5/16" x 3/4" Hex Bolt (pl)
29	81568	5/16" Hex Nut (pl)
30	81569	5/16" Lock Washer (pl)
31	81638	9/16" ID Flat Washer (pl)
32	9812430	1/8" x 1" Cotter Pin (pl)
33	81552	5/16" x 1 1/4" Hex Bolt (pl)
34	811795	3/8" x 2" Hex Bolt (pl)
35	81592	3/8" Hex Nut (pl)
36	963098	Guard Back Pl Right
37	963099	Guard Back Pl Left
38	963527	Tube - 5" x 10'
	963627	Tube - 6" x 10'
39	963529	5" Extension Coupling
	963629	6" Extension Coupling
40	963528	5" x 10' Flighting w/ Coupling Shaft
	963628	6" x 10' Flighting w/ Coupling Shaft
41	9812349	1/4" x 1 1/2" Gr.8 Hex Bolt (pl)
42	84498	1/4" Lock Nut (pl)
43	902969	5" Spout
44	902970	5" Clamp
45	902967	6" Spout Assembly
46	902968	3/4" x 10 1/2" Spout Clamps
47	81636	1/2" Hex Nut (pl)



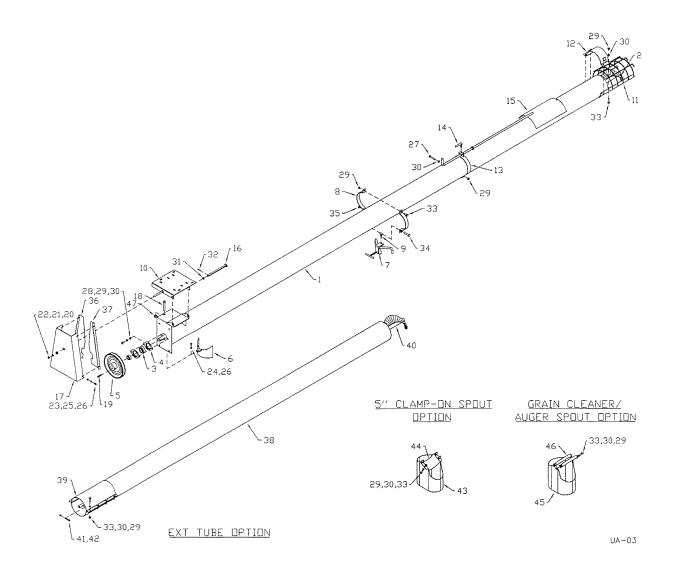



## SHIPPING KIT AND BUNDLE NUMBERS

The following is a list of Kit Numbers for this product and the Bundle Numbers, Descriptions, and Quantities for each Kit.

QUANTITY	BUNDLE NO.	DESCRIPTION						
Y511 5" x 11' UTILITY AUGER								
1	F1100	5" x 11' Utility Auger						
1	F1101	Carton of Parts						
Y516 5" x 16' l	UTILITY AUGER							
1	F1101	Carton of Parts						
1	F1110	5" x 16' Utility Auger						
Y521 5" x 21' l	UTILITY AUGER							
1	F1101	Carton of Parts						
1	F1120	5" x 21' Utility Auger						
Y611 6" x 11' l	Y611 6" x 11' UTILITY AUGER							
1	F1200	6" x 11' Utility Auger						
1	F1201	Carton of Parts						
Y616 6" x 16' UTILITY AUGER								
1	F1201	Carton of Parts						
1	F1210	6" x 16' Utility Auger						
Y621 6" x 21' UTILITY AUGER								
1	F1201	Carton of Parts						
1	F1220	6" x 21' Utility Auger						

## **OPTIONAL BUNDLE NUMBERS**

The following is a list of options available for the Kits listed above.

remerring to a net or options a randore for					
F1130	5" x 10' Extension				
F1102	5" Flow Control				
F1104	5" Bolt-on Spout				
F1230	6" x 10' Extension				
F1203	6" Flow Control				
F1202	6" Bolt-on Spout				
F3002	Flex Spout (galvanized)				

#### **DIVISION LOCATIONS**

Farm King Division 301 Mountain Street S. Morden, MB R6M 1X7 Ph.: (204) 822-4467 Fax: (204) 822-6348

Allied/Inland Division 1260 Clarence Avenue Winnipeg, MB R3T 1T2 Ph.: (204) 284-6100 Fax: (204) 477-2325

B.I.I. Division 1330 43<sup>rd</sup> Street N.W. Fargo, ND 58102 Ph: (701) 282-7014 Fax: (701) 282-5865

#### **U.S. WAREHOUSES**

AR, West Memphis (870) 732-3132

GA, Stone Mountain (770) 908-9439

ID, Meridian (208) 887-6006

IN, Clarksville (812) 284-3376

KS, Wichita (316) 265-9577

MN, Lakeville (952) 469-5267

MT, Billings (406) 248-7771

ND, Bismarck (701) 223-1886 ND, Fargo

(701) 282-7003

NE, Blair (402) 426-8211

OH, Youngstown (330) 793-0862

OR, Beaverton (503) 641-1865

SD, Huron (605) 352-8616

TX. Houston (713) 928-2632

UT, Salt Lake City (801) 972-4321

WI. Portage (608) 742-1370

#### **CANADIAN WAREHOUSES**

B.C., Abbotsford (604) 864-2665

AB, Edmonton (780) 962-6991

SK, Regina (306) 781-2300

ON, Woodstock (519) 539-0435

QC, Dorion (450) 455-4840

#### **OFFSHORE WAREHOUSES**

Burando Hill Katanning W. Australia 011-618-98-214422

Chihuahua, Mexico 011-52-158-90306

John Kerr Equipment Ltd. Wilcoxholm Farm Linlithgow, W. Lothian Scotland 011-441-506-842280

Skovde, Sweden 011-46-500-452651

Naestved. Denmark 011-45-557-29511



301 Mountain Street S. Morden MB. **R6M 1X7** 

Ph.: (204) 822-4467 Fax: (204) 822-6348 www.buhler.com